

TORQUE LIMITER FOR GEARBOXES

up to 2,800 Nm and 65 mm bore diameters



ED. 07/2021




德陽興業有限公司
TECH YANG CO., LTD.

台南: 台南市歸仁區保吉路276號A棟
TEL: +886-6-270 9690 / FAX: +886-6-273 9898
台中: 台中市沙鹿區光華路391巷25號
TEL: +886-4-2665 6161 / FAX: +886-4-2665 6633

.../PR

.../PR - torque limiter for gearboxes: introduction

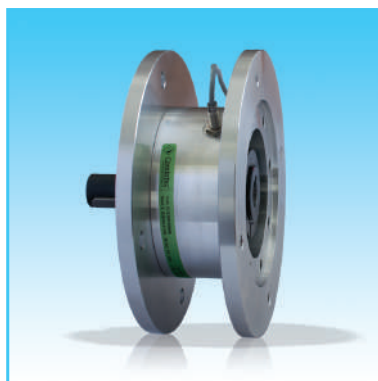

- ⦿ Safety coupling made in steel fully turned, spacer made in aluminium fully turned for IEC-B5 motors
 - ⦿ Standard treatment of phosphating on torque limiter.
 - ⦿ Compact solution.
 - ⦿ Model available for IEC motors and gearboxes.
 - ⦿ Protection in both directions.
 - ⦿ Instant disengagement upon overload.
 - ⦿ Fast and simple calibration using our "H" dimension procedure.
- ON REQUEST
- ⦿ Device calibrated and ready to use.
 - ⦿ Friction rings available in various materials and performance to suit specific needs.
 - ⦿ Free rotation backlash free balls model according to ATEX conformity.
 - ⦿ Various anti-corrosive surface treatments available.

Safety coupling to be mounted between the motor and gearbox with flanged B5 spacer. Available in sliding (DF/TAC/PR-V) and disengage versions (DSS/F/SG/PR-V or DSS/SG/RF/PR-V). The location of the limiter between the motor and gearbox requires a smaller size of device with also reduces costs.

■ MAIN APPLICATION

- ⦿ Conveyor.
- ⦿ Packaging machines.
- ⦿ Wrapping machines.
- ⦿ Motorized systems of handling and positioning.


■ ADVANTAGES AND BENEFITS

- ⦿ Simplicity and sensitivity compared to gearbox integrated solutions.
- ⦿ Protect the motor-gearbox from accidental collisions or impacts from the products being processed.
- ⦿ Greatly reduces production downtime in case of overload.
- ⦿ Absorb static torques without disengaging (friction model).

	DSS/F/SG/PR-V: Backlash free balls model to fit between motor and gearbox. DSS/SG/RF/PR-V: Free rotation backlash free balls model according to ATEX 2014/34/UE conformity. II 2G Ex II B T5 Gb -15 °C ≤ Ta ≤ + 80 °C	From 2 - 1,300 Nm of torque 65 mm max. bore / shaft	Page 57
	DF/TAC/PR-V: Friction model chain coupling version to fit between motor and gearbox.	From 1 to 1,650 Nm of torque 55 mm max. bore / shaft	Page 58
	DF/PR: Friction model to assemble directly into the output of the hollow shaft gearbox.	From 1 to 2,800 Nm of torque 65 mm max. bore 55 mm max. shaft	Page 59

DSS/F/SG/PR-V and DSS/SG/RF/PR-V- backlash free balls model for gearboxes (input shaft):
technical data

- Balls solution, torsional backlash free, maintenance free.
- Instant disengagement between driving part and driven part in the event of overload.
- Available with single point (360°) engagement or free rotation according to ATEX conformity (DSS/SG/RF/PR-V).
- Complete solution with connecting flanges in aluminum for IEC-B5 motors.
- Inductive sensor integrated for monitoring the overload.
- Torque range: 2-1,300 Nm; bore/shaft max ø48 mm.

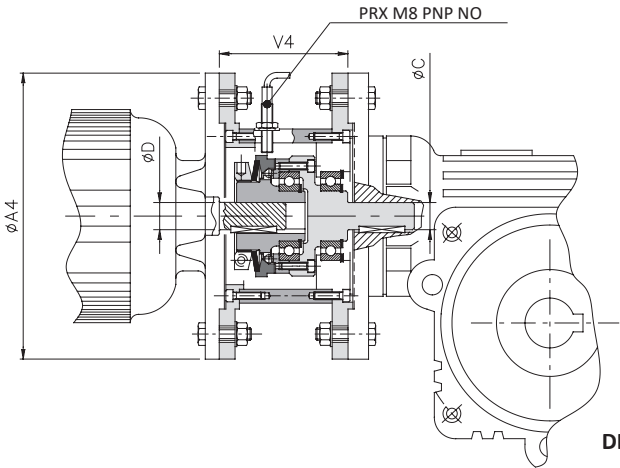

version DSS/SG/RF/PR-V
II 2G Ex II B T5 Gb -15°C ≤ Ta ≤ +80°C


DIMENSIONS AND TECHNICAL CHARACTERISTICS

				Model: DSS/F/SG/PR-V							 Model: DSS/SG/RF/PR-V						
Motor IEC	D H7 C h7	A4 B5 Flangie	T.L. Size	Torque [Nm]				V4	Max speed [Rpm]	Weight [Kg]	Torque [Nm]				V4	Max speed [Rpm]	Weight [Kg]
				T1	T2	T3	T4				T1	T2	T3	T4			
63	11	140	00.47	2-5,6	5,3-12	-	11-24	52,5	4000	3,5	-						
71	14	160		2-5,6	5,3-12	-	11-24	55	4000	4,2	-						
80	19	200	0.63	5-14	12-28	24-50	-	78	4000	8	5-14	10-30	20-50	-	86	4000	8
90	24	200	1.80	9-28	18-60	40-100	-	90	3000	9	9-30	20-70	30-100	-	99	4000	10
110-112	28	250	2.96	20-45	42-95	-	85-200	110	2500	17	20-54	40-95	-	80-200	121	4000	18,5
132	38	300	3.116	35-100	75-200	-	195/415	110	2000	24	50-95	90-185	-	180-400	140	4000	29,5
160	42	350	4.138	75-190	140-345	-	245-720*	126	1850*	33,5	70-190	125-345	-	300-720	148	3000	37,5
180	48									36							40
200	55	400	5.172	-							120-350	230-670	-	500-1300	192	3000	70
225	60	450													192		80
250-280	65	550													194		110

* For calibrations over 350 Nm the maximum speed is reduced to 1200 Rpm

▲ On request

FITTING EXAMPLE

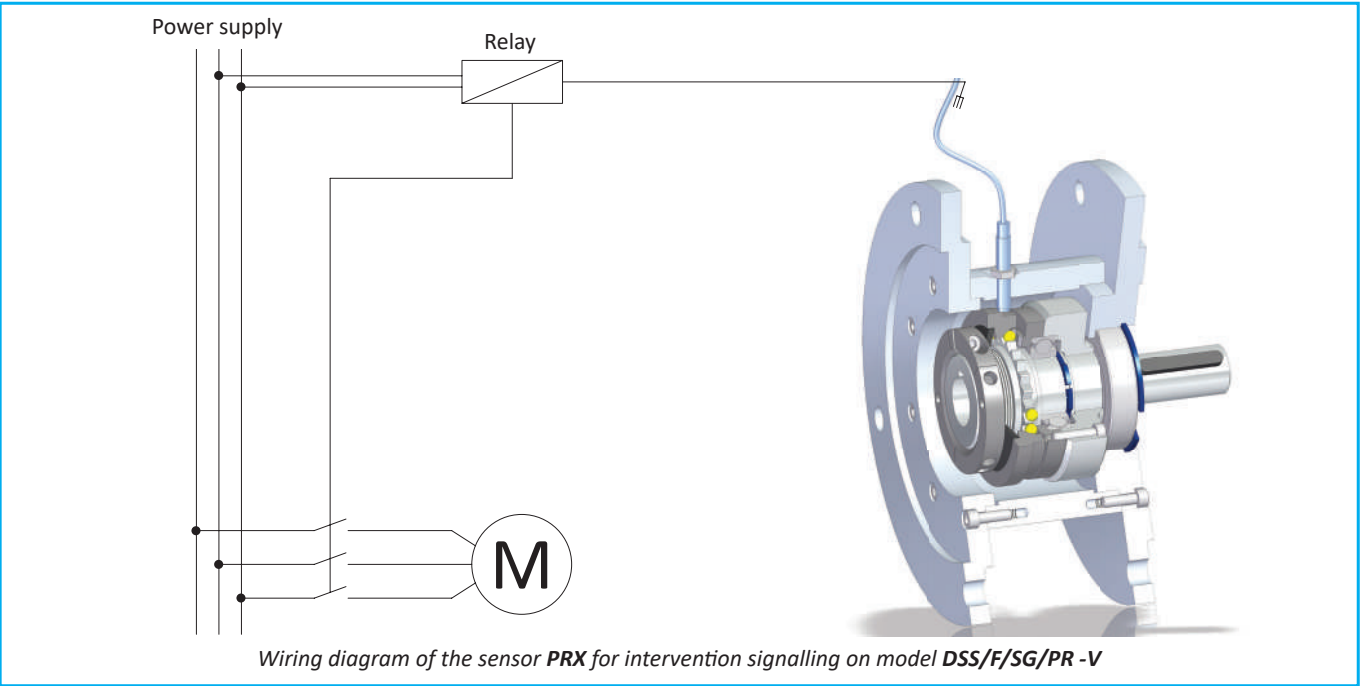


Wiring diagram of the sensor PRX for intervention signalling on model DSS/F/SG/PR -V


DF/TAC/PR-V - friction model with chain coupling for gearboxes (input shaft): technical data



- Compact and economic solution.
- Sliding of the driving part to overcome the torque calibration without disconnecting the transmission.
- Silent intervention and vibration-free.
- Complete solution with connecting flanges in aluminum for IEC B5 motors.
- Possibility of integration of an inductive sensor for monitoring the overload (DF/TAC/PR-V/S).
- Torque range: 1-1,650 Nm; bore/shaft max: $\varnothing 55$ mm.

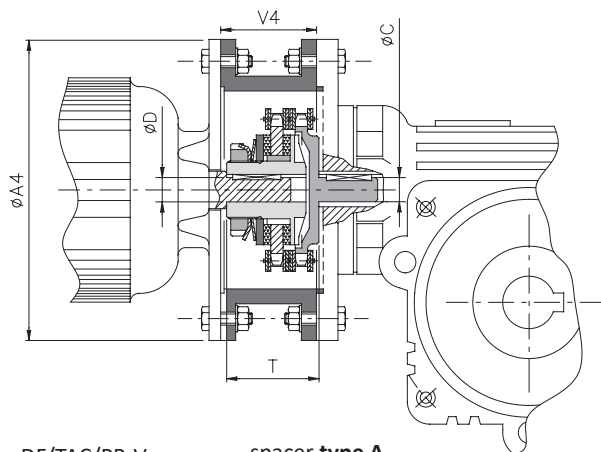

DF/TAC/PR-V (without sensor) → spacer **type A** (with inspection)

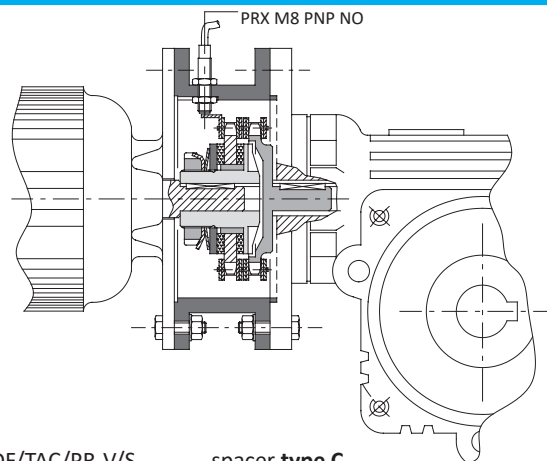


DF/TAC/PR-V/S (with sensor) → spacer **type C** (with inspection)

DIMENSIONS AND TECHNICAL CHARACTERISTICS

Size	Torque [Nm]				Motor IEC	DF/TAC/PR-V		Spacer for B5 flange		Max speed [Rpm]	Weight [Kg]	
	T0	T1	T2	T3		D H7 - C h7	T	A4	V4		limiters	spacer
00.38	-	1 - 14	8 - 22	15 - 34	63a	11	43	140	43	5000	0,6	0,5
					71a	14 *		160				0,6
0.50	2 - 12	9 - 42	25 - 70	46 - 90	80a	19	45	200	45,5	3800	1	1
					90S	24 *			55,5		0,9	1,5
1.70	4 - 20	15 - 80	30 - 150	80 - 230	100La - 112M	28	64	250	66	2800	2,6	2,2
2.90	12 - 85	55 - 160	95 - 290	175 - 450	132M	38	72	300	83,5	2200	3,8	2,9
3.115	65 - 265	130 - 380	200 - 700	290 - 950	160L	42	104	▲ 350	121	1800	10,2	5,8
					180L	48					10,4	5,8
4.140	-	95 - 700	200 - 1300	280 - 1650	200L	55	104	▲ 400	122	1500	18	9

▲ On request

FITTING EXAMPLES

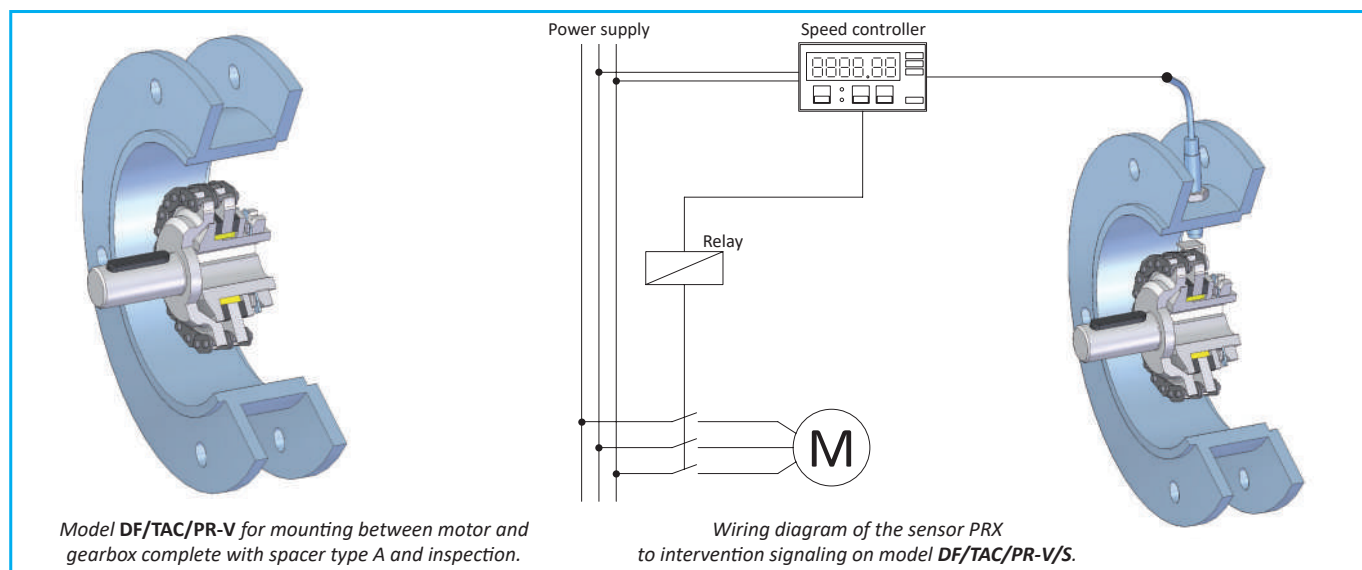



NOTES

- D H7 *: reduced keyway on torque limiter.

DF/PR and DF/TAC/PR - friction model for gearboxes (output shaft): technical data

ON REQUEST MODEL

- Possibility of friction rings with different performance for specific needs.
- Specifically designed for installation on hollow output shaft gearboxes.
- Available complete with transmission component fully turned and fitted.
- Available with radial nut (.../GR) statically balanced.
- Model for gearboxes with a chain coupling, suitable for connections of coaxial shafts (DF/TAC/PR).
- Torque range: 1-2,600 Nm; max shaft: $\varnothing 55$ mm; max bore: $\varnothing 65$ mm.

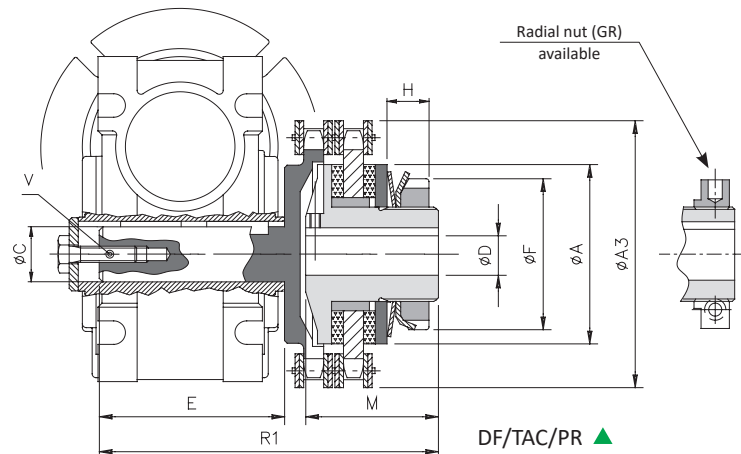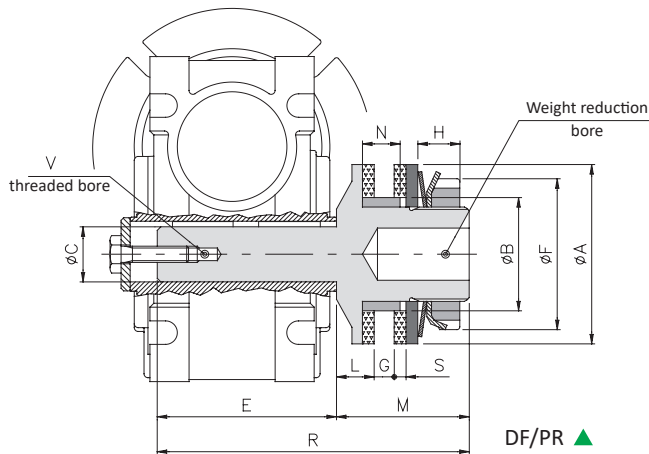

DIMENSIONS

Size	A3	A	B h7	C h7	D H7 max	E	F	G		L	M	N	R	R1	S	V
								min	max							
00.38	57	38	24	11	12	48	32	2,5	5	8	33	8	81	91	2,5	M4x10
0.50	75	50	36	14	20	53	44	3,5	6	10	35	10	88	98	3	M5x13
1.70	101	70	45	18	25	62	63	5	10	15	55	15	117	126	4	M6x16
				19		78							133	142		
				24		90							145	154		
				25		80							135	144		
2.90	126	90	60	25	38	90	82	7	12	16	60	17	150	164	4	M8x20
				28		110							170	182		
3.115	159	115	72	32	45	120	104	9	16	18	70	21	190	212	4	M10x25
				35		118							188	210		
				38		138							208	230		
4.140	184	140	85	42	55	152	130	13	19	20	80	25	232	258	5	M12x32
				45		163							243	269		
				48		178							258	284		
5.170	215	170	98	50	65	167	158	15	22	22,5	95	28	262	286	5	M16x40
				55		202							303	327		

TECHNICAL CHARACTERISTICS

Size	Torque [Nm]				Max speed [Rpm]		Weight [kg]	
	T0	T1	T2	T3	DF/PR	DF/TAC/PR	DF/PR	DF/TAC/PR
00.38	-	1 - 14	8 - 22	15 - 34	10000	5000	0,2	0,6
0.50	2 - 12	9 - 42	25 - 70	46 - 90	7600	3800	0,4	1,0
1.70	4 - 20	15 - 80	30 - 150	80 - 230	5450	2800	1,2	2,8
2.90	12 - 85	55 - 160	95 - 290	175 - 450	4250	2200	2,2	5,7
3.115	65 - 265	130 - 380	200 - 700	290 - 950	3350	1800	3,9	10,7
4.140	-	95 - 700	200 - 1300	280 - 1650	2750	1500	7,3	19,3
5.170	-	100 - 950	600 - 1900	800 - 2800	2250	1300	12,1	29,8

▲ On request

NOTES

- Weight refer to the torque limiter pilot bore.

.../PR - torque limiter for gearboxes: additional information

ORDER EXAMPLE

TORQUE LIMITER FOR GEARBOXES					+	DRIVE ELEMENT (ref. to DF/PR)	
Size	Model	Spacer	Shaft / Bore	Torque/Springs		Description	
0.50	DF/TAC/PR-V	with type A spacer	ø28 h7/H7	T1		Simple plate wheel 3/8" x 7/32" Z=22	






Size	Model	Spacer	Springs
00.38 to 5.170	DSS/F/SG/PR-V	● Spacer (ref. to TAC/PR-V)	T0
00.47 to 4.138	DSS/SG/RF/PR-V (ATEX)	Type A	T1
	● DF/TAC/PR-V		T2
	● DF/TAC/PR-V/S		T3
	DF/PR		T4

- DF/TAC/PR-V model is supply combined with the corresponding spacer (type A)
- DF/TAC/PR-V/S model is supply combined with the corresponding spacer (type C), complete with inductive proximity sensor (PRX).


PRX - inductive proximity sensor: technical data



- Standard version with brass cover with protection **IP67** DIN 40050.
- Electric contact 5 ÷ 24 VCC and working frequency 2000 Hz.
- Operating temperature from -20°C to +70°C.
- Output: NPN (N.O. - N.C.); PNP (N.O. - N.C.).
- Intervention distance: max 1 mm.
- Cable length: 2 meter (3x0,2).

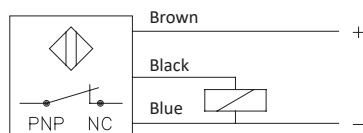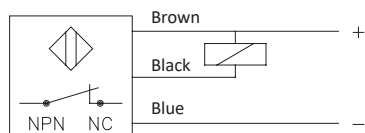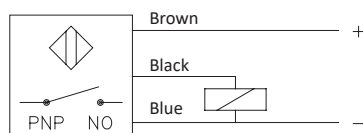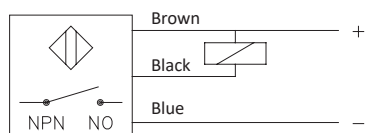

Weight: 50g



PRX-EX - ATEX proximity induced sensor



- Housing in nickel-plated brass with IP67 - DIN 40050 protection clearance.
- Voltage 8.2 Vdc (1K0hm).
- Operating temperature from -25°C to +60°C.
- Intervention distance: max 1 mm.
- Cable length: 3 meters (2x0.25).

